

TAMA COUNTY
HIGHWAY DEPARTMENT
ENTRANCE APPLICATION



Date _____

APPLICANT _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____


TELEPHONE _____ OWNER _____

LOCATION OF ENTRANCE _____

SECTION _____ TOWNSHIP _____


SPECIFICATIONS

1. All culvert pipe used shall comply with current Iowa Department of Transportation Specifications for concrete or corrugated metal pipe. Plastic pipe may be used but Tama County will assume no maintenance responsibility for entrances using such pipe.
2. Diameter and length of pipe shall be as shown below.
3. The owner shall provide all labor and materials. (Includes extensions of existing entrances).
4. All entrances (except field entrances) shall be surfaced with a minimum of two (2) inches of Class "A" Road Stone.
5. Maximum slope of entrance ends on all paved roads shall be 10 to 1 for dryfills and 8 to 1 if a culvert is involved. The slope shall be measured with respect to the slope of the road ditch - not with the horizontal.

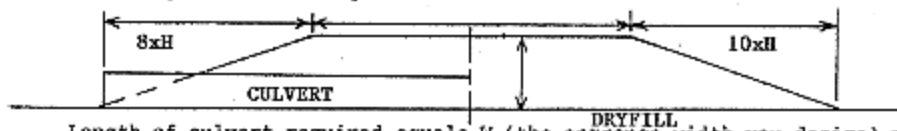

Length of culvert required equals W (the entrance width you desire) plus 16 times H (the distance from the top of the entrance to the ditch bottom).

6. Maximum slope of entrance ends on all gravel and dirt roads shall be 3 to 1.

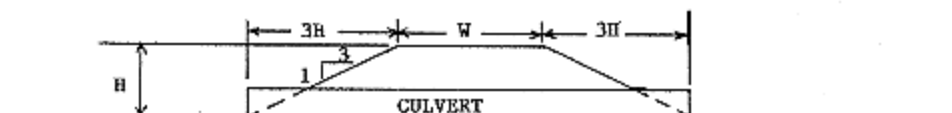

Length of culvert required equals W (the entrance width you desire) plus six times H (the distance from the top of the entrance to the ditch bottom).

7. Approximately midway between the right of way line (fence line) and the edge of the road, the elevation of the entrance shall be at least six (6) inches lower than that of the edge of the road.

NOTE: Culverts may be purchased at area businesses or from the Tama County Highway Department.

APPROVED:

COUNTY ENGINEER _____ SIGNATURE OF OWNER OR APPLICANT _____

PRELIMINARY INSPECTION DATE _____ FINAL INSPECTION DATE _____

CULVERT SIZE AND LENGTH _____

INSPECTED BY: PRELIMINARY _____ FINAL _____

THIS PERMIT VALID FOR 6 MONTHS ONLY!